



LineGard | PGFS Series

40, 50, 60 Amp Permanent Series (Splice-In) GFCI / ELCI

INTRODUCTION

The LineGard™ 40, 50 and 60 Amp Permanent Series is an industrial grade ground fault interrupter device designed and manufactured by North Shore Safety, Ltd., a leader in innovated safety products. These units are ideal for both new and existing circuit installations and have a unique design that offers the flexibility of splicing this device anywhere within the length of a circuit run. (Note: ELCI only protects downstream or “load side”) This convenience allows the installer to place this ELCI at an accessible location for the end user.

As configured the device has three fault threshold settings of 6mA, 10mA and 30mA, with all engineered trip times of 25mS or less. These units come standard with 24” lead wires for electrical splicing and two 1” flexible conduit fittings for integration to 1” flexible or burial conduit. All units are MADE IN THE USA and are UL 1053 Compliant.

FEATURES

- Power and fault status indicators
- Double insulated user interface
- Chemical and UV resistant enclosure
- UL 1053 Compliant
- 40, 50 and 60 amp configurations in 1Ø 120 VAC, 1Ø 240 VAC, 120/240 VAC, 3Ø 240 VAC, 3Ø 208 VAC, 3Ø 277 VAC (Available with or without neutral), 3Ø 277/480, 3Ø 480 VAC, 3Ø 600 VAC
- Fault level key switch - max. trip threshold 6mA, 10mA, and 30mA
- Surge protection optional
- NEMA 4X wet location rated (indoor / outdoor)
- Automatic or manual reset key switch¹
- Xenon strobe indication on ground fault

SPECIFICATIONS

Listing Type	UL 1053 Compliant
Rated Supply Voltage	120 VAC 1Ø to 600 VAC 3Ø
Rated Current	40 thru 60 Amps or rating of wiring device and/or cable
Trip Level	Field selectable threshold @ 6mA, 10mA and 30mA
Operating Frequency	60 Hz
Reset Type¹	Field selectable automatic or manual ¹
Phase	Single, dual and 3 phase
Response Time	25mS max
Operating Temperature	-35°C to 66°C
Operating Voltage Range	85% to 110% of rated VAC
Let-Go Voltage	60% of supply voltage
Open Neutral Protection	Trips upon loss of neutral
Grounded Neutral Protection	Trips if ground and neutral touch at load side


1. Manual configuration should be specified if automatic start-up after power restoration of circuit power creates an unsafe condition.

RELATED CODES	
Confined Space	OSHA 29 CFR 1926.404 (b)(1)(ii), OSHA 29 CFR 1926.405 (a)(2)(ii)(G)
Construction Sites	(NEC 590.6)
Commercial Garages	(NEC 511.12)
Outdoor Signs	(NEC 600.10)
Fountains & Water Displays	(NEC 680.58)
Spa & Hot Tubs	(NEC 680.40)
Marinas & Boat Yards	(NEC 555.3)

APPLICATION OPPORTUNITIES:

- Electrical wet locations
- Power generators
- Agricultural equipment
- Outdoor electrical equipment
- Cement cutting equipment
- Portable electric heaters
- Submersible pumps
- Pipeline heaters
- Automotive garages
- Industrial part washers
- Outdoor signage
- De-icing equipment (roof heaters)

DECISION TABLES

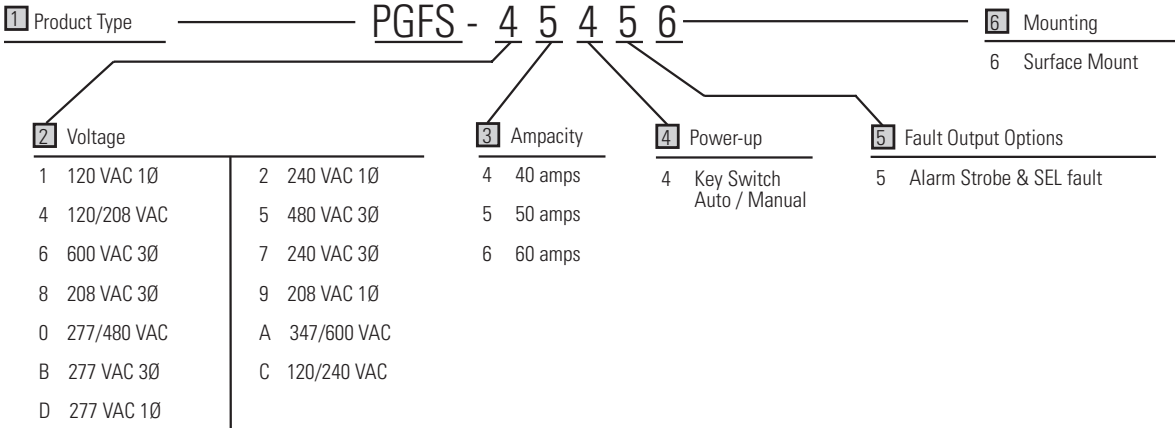

This document is generated from the AIRPAX™ full-line catalog #2455005000 printed in USA, January 2011

BUSINESS CENTERS

Sensata Technologies

807 Woods Road
Cambridge, MD 21613, USA
Phone: +1 410-228-1500
Brands: Airpax™

Sensata Technologies Inc.

529 Pleasant Street
Attleboro, MA 02703, USA
Phone: +1 508-236-3287
Brands: Klixon™, Sensata Technologies™

Sensata Technologies

4467 White Bear Lake Parkway
St. Paul, MN 55110, USA
Phone: +1 800-553-6418
Brands: Dimensions™

Sensata Technologies Holland B.V.

Kolthofsingel 8
7602 EM Almelo, The Netherlands
Phone: +31 546 87 95 55
Brands: Klixon™, Sensata Technologies™

Sensata Technologies China Co., Ltd.

Novel Plaza, 8th Floor
128 Nanjing Road West
Shanghai, 20003
People's Republic of China
Phone: +86 21 23061500
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Korea Ltd.

29F, Trade Tower
159-1 SamSung-Dong, KangNam-Ku, Seoul
135-729, Korea
Phone: +81-2-551-2918
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Japan Ltd.

305, Tanagashira
Oyama-cho, Sunto-gun, Shizuoka-ken
Japan, 410-1396
Phone: +81 550 78 1211
Brands: Klixon™, Sensata Technologies™

Sensata Technologies Nihon-Airpax

6-3, Chi Yoda 5 Chome
Saitama-Ken
Japan, 350-0214
Phone: +81 492 83 7575
Brands: Airpax™



Important Notice: Sensata Technologies (Sensata) reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Sensata advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current. Sensata assumes no responsibility for infringement of patents or rights of others based on Sensata applications assistance or product specifications since Sensata does not possess full access concerning the use or application of customers' products. Sensata also assumes no responsibility for customers' product designs.

<http://airpax.sensata.com/>